

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 1 litre

KEEP OUT OF REACH OF CHILDREN

LL3990001 10/23

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. This material is quite bland; with vapour, occasional skin contact and even minor ingestion having negligible hazard. Repeated skin contact may, and any eye contact will, cause irritation. Harmful to aquatic life.

PRECAUTIONS

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Avoid release to the environment.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention. Take off all contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention. When seeking medical advice take this container with you.

Further information can be obtained from AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D403.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.


CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways.

Resene

Broadwall

Waterborne Wallboard Sealer

interior

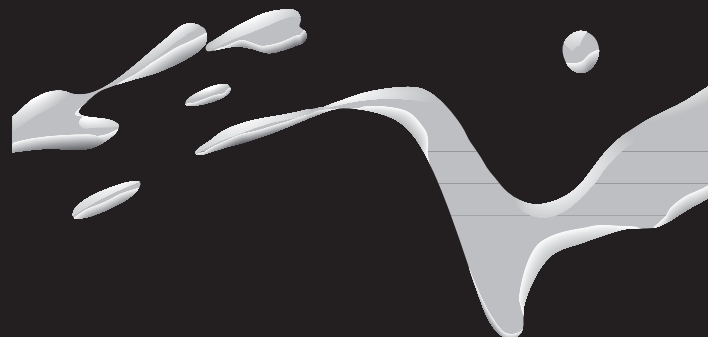

DO NOT TINT

Resene Broadwall Waterborne Wallboard Sealer is a water reducible first coat for plasterboard walls and air-dry stoppings designed to minimise porosity and textural differences.

Preparation

- Ensure surfaces to be painted are dry, free from dust, loose material and weak powdery or uncured stoppings. A wipe with a damp cloth or sponge will remove most sanding dust.
- Oil and grease must be removed prior to painting using Resene Paint Prep and Housewash (see Data Sheet D812).
- Fill cracks and holes with an appropriate filler before sealing.
- Where staining is present the source must be removed.
- Avoid sanding the paper as this will cause furring and unacceptable textural differences in the finish.
- Where the paper surface has yellowed due to prolonged exposure to light or is stained, use Resene Sureseal (see Data Sheet D42).

All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate-based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.

- Prepare plasterboard to an appropriate level of finish. Apply Resene Broadwall Surface Prep & Seal (see Data Sheet D807), Resene Broadwall 3 in 1 (see Data Sheet D810) or Resene Sureseal (see Data Sheet D42 or waterborne see Data Sheet D42a) followed by lining paper in critical lighting areas.

This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

Application

- Generally one coat is sufficient.
- In typical drying conditions Resene Broadwall Waterborne

Wallboard Sealer may be overcoated after two hours with waterborne paints and four hours with solventborne paints. In cooler weather Resene Broadwall Waterborne Wallboard Sealer is best overcoated after eight hours with waterborne paints and 12 hours with solventborne paints.

- Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system when painting in marginal painting conditions. Do not use gas or diesel burners to heat coated area as these produce water that will inhibit drying and curing. Poor ventilation may affect appearance and performance.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.



Broadwall Waterborne Wallboard Sealer SDS



Broadwall Waterborne Wallboard Sealer TDS

Resene

the paint the professionals use

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Quick check

Use on: Interior plasterboards, air-dry (polymer based) stoppings and finishing compounds.

Gloss level: Low sheen.

Coverage: 12 square metres per litre per coat, dependent on surface porosity.

Dry time (minimum): 2 hours. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during the drying period. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

Recoat time (minimum): 2 hours for waterborne paints.

Usual number of coats: Usually one.

Application method: Brush, speed brush, synthetic roller or spray.

Thinning and clean up: Water.

Colour: Off white.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.