

net contents 1 litre

LL3812001 11/20

**SAFETY PRECAUTIONS**

Read label before use. Keep out of reach of children. May cause damage to organs. Causes skin irritation. Causes serious eye irritation. Suspected of damaging fertility or the unborn child. May be harmful if swallowed. Harmful to aquatic life with long lasting effects.

**PRECAUTIONS**

DO NOT BREATHE MISTS, VAPOURS OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Avoid release to the environment. Obtain special instructions before use.

**FIRST AID**

IF SWALLOWED: Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation occurs get medical advice. Take off immediately all contaminated clothing.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

If exposed or concerned: Call a POISON CENTRE or doctor/physician. If medical attention is required: have product container or label at hand. Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

For use as a decorative/protective coating.

For full technical instructions see Data Sheet D409.

**SPILLS:** Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority. Clean up spillage.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner.

**In case of fire:** Use foam, CO2, dry chemical for extinction.


**WARNING**

KEEP OUT OF REACH OF CHILDREN

# Resene

## ConcreteSeal 3 in 1


concrete primer, sealer and dust coat

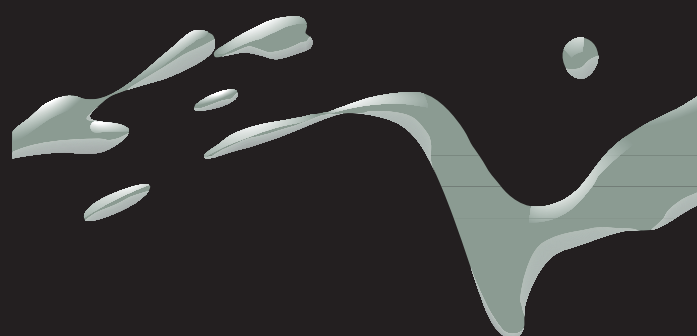

Resene ConcreteSeal 3 in 1 is a versatile fast drying primer/sealer for concrete that may also be used as a coloured dust coat for new and aged interior concrete floors.

**Preparation**

- Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.
- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).
- If moss and mould are present, treat with Resene Moss & Mould Killer (see Data Sheet D80). Efflorescence on masonry must be treated (see Data Sheet D83).
- Waterblasting at 21.000 kps (3000psi) is the best surface preparation prior to painting of exterior weathered cementitious surfaces.
- Wherever oil and grease are present ensure the surface to be coated is thoroughly cleaned using Resene Paint Prep and Housewash. Flush clean with water. For heavy contamination scrub down with Resene Emulsifiable Solvent Cleaner (see Data Sheet D804) then rinse clean with water.
- GRC panels - mould release agents and defoamers present on the surface must be removed by using Resene Brush Cleaner followed by liberal rinsing with clean water.
- Ensure all wax or hydrocarbon resin curing membranes are either weathered off or removed by physical or chemical means.
- **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**
- Consult your Resene ColorShop or reseller for technical advice if corrosion is present.
- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

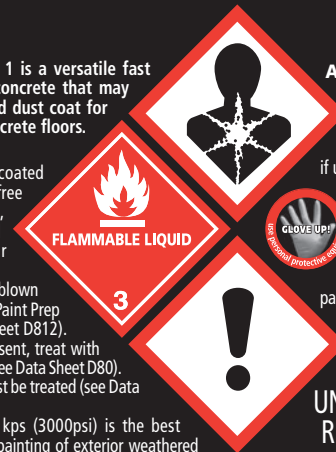

**Application**

- Apply one full coat. Will obtain maximum adhesion after several days.
- A single coat is required when using as an adhesion primer/sealer with two coats required if using as a stand alone interior floor finish.

**Be PaintWise**

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.

UN NO. 1263 – PAINT RELATED MATERIAL

**FLAMMABLE LIQUID AND VAPOUR**

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.



**Resene**  
the paint the professionals use



In Australia: Resene Paints (Aust) Limited  
7 Production Ave, PO Box 924, Beenleigh, Qld 4207  
Ph 1800 738 383 Visit [www.resene.com.au](http://www.resene.com.au)

In New Zealand: Resene Paints Limited  
Vogel St, PO Box 38242, Wotn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit [www.resene.co.nz](http://www.resene.co.nz)

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAI, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

**Quick check**

**Use on:** Primer/sealer for concrete, concrete floors, tilt slab. As a dust coat for interior concrete floors.

**Gloss level:** Satin.

**Coverage:** 14 square metres per litre per coat.

**Dry time (minimum):** Touch dry 15 minutes. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions. Coverage will vary with substrate porosity.

**Recoat time (minimum):** 1 hour at 17°C.

**Overcoating:** Suitable for overcoating with Resene epoxies, vinyls, urethanes, alkyls and acrylics. Not suitable for direct overcoating with Resene Imperite solid or metallic colours. Resene ConcreteSeal 3 in 1 is not designed to give long term exterior protection without overcoating. Drying times of alkyl based paints may be extended when applied directly over Resene ConcreteSeal 3 in 1.

**Usual number of coats:** One (primer/sealer), two (finish).

**Application method:** Brush, roller (use Resene No.5 roller sleeve) or spray. Consult Resene for advice on appropriate equipment and set up for spray application. Light bubbling may occur with roller application and will require tipping off by brush.

**Thinning:** Supplied at application viscosity. Do not thin.

**Clean up:** Resene Thinner No.9 or Methylated Spirits.

**Colour:** Concrete grey.

**Before use:** Stir well with a wide flat stirrer.

In all situations a test patch is recommended to confirm adhesion, especially when removal of curing membranes or release agents cannot be established or undertaken.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.