

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes serious eye irritation. Causes mild skin irritation. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure. Toxic to aquatic life with long lasting effects.

PRECAUTIONS

DO NOT BREATHE MIST, VAPOURS OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Take action to prevent static discharges. Avoid release to the environment.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water. If skin irritation occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

If exposed or concerned, seek medical advice.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Xylene 10-75 gms/L.

For use as a decorative/protective coating.

For full technical instructions see Data Sheet RA30A.

SPILLS: Use appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner.

IN CASE OF FIRE: Use foam, CO₂, dry chemical for extinction.


WARNING

KEEP OUT OF REACH OF CHILDREN

Resene

Rust-Arrest

anti-corrosive primer

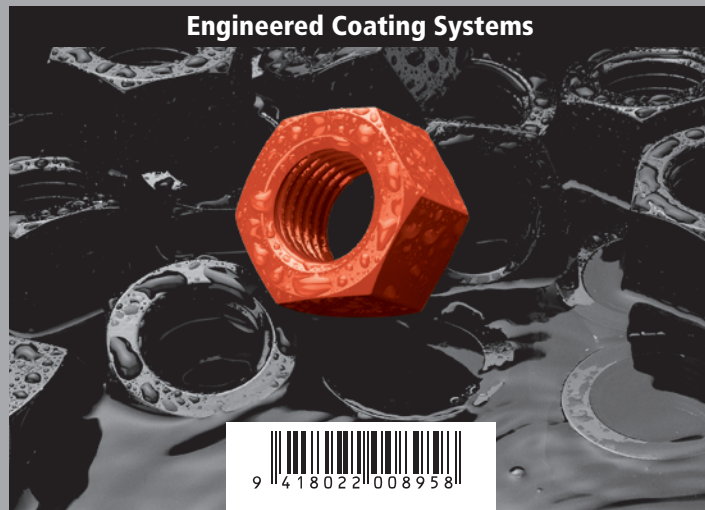Engineered Coating Systems

Resene Rust-Arrest is a lead and chromate free primer developed for use on steel where optimum surface preparation is not practical. Resene Rust-Arrest has good surface wetting properties and protects via passivating pigments.


General

- Safety Data Sheet (SDS) is available and must be consulted before use.
- In every case it is recommended that the current Resene Data Sheet is consulted for product data and surface preparation information.
- The paint must be thoroughly mixed before use. Efficient mixing at all stages requires power mixing with an air or explosion proof mixer until uniformly blended.
- Thinning requirements may vary according to application method, equipment and environmental conditions. Excessive thinning will reduce the dry film build and may result in the appearance of runs or sags in the coating.
- After thinning thoroughly re-mix using the power mixer.
- Ensure correct wet film thickness is applied to achieve required dry film thickness. Allowance must be made for any thinner added.
- Use of incorrect thinner may have adverse effect on application and performance.
- Drying is affected by low temperatures and high humidity.
- The temperature of the substrate should be 3°C above the "Dew Point".
- The "Dew Point" requirement can be presumed to be satisfied if a thin clearly defined film of water applied to the cleaned surface with a damp cloth evaporates within 15 minutes.
- Following appropriate preparation, all surfaces must be dry and clean prior to painting.
- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or

not referred to, contact your local Resene ColorShop or reseller for your nearest Technical Representative.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.



UN NO. 1263 – PAINT RELATED MATERIAL

FLAMMABLE LIQUID AND VAPOUR

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources.



Rust-Arrest SDS

Resene

the paint the professionals use



Rust-Arrest TDS

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld 4207
Ph 1800 738 383 Visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SA, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

Quick check

Name: Resene Rust-Arrest.

Generic type: Alkyd anti-corrosive primer (inhibitive).

Colour: Red oxide.

Finish: Low sheen.

Application method: Brush, roller or conventional spray.

Recommended dry film thickness (D.F.T.): 40–50 microns per coat.

Theoretical coverage: 13.75 square metres per litre per coat at 40 microns D.F.T. 11 square metres per litre per coat at 50 microns D.F.T.

Dry time (minimum): Surface dry: 4 hours at 18°C. Hard dry: 24 hours at 18°C. Drying is affected by low temperatures and high humidity.

Recoat time (minimum): Acrylic/alkyd: 24 hours at 18°C (minimum), one month (maximum). Sanding of Resene Rust-Arrest is required if recoating beyond maximum recoating time.

Usual number of coats: 1 (2 for severe exposure or when topcoating with an acrylic system).

Thinning and clean up: Resene Thinner No.10 (brush/roller application); Resene Thinner No.12 (spray application).

Resene Data Sheet: RA30A.

Limitations: Do not apply directly to zinc rich surfaces, such as bare galvanised steel, Zinalume, or zinc primers. Not recommended for immersion service. Not designed for exterior exposure without overcoating.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.